


CapXon KM Series

KM Series Standard 105°C

Features

- ◆ Used in communication equipments, switching power supply, etc.
- ◆ Safety vent construction design.
- ◆ For detail specifications, please refer to Engineering Bulletin No. E102
- ◆ RoHS Compliant

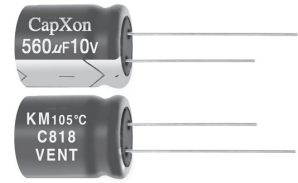


Specifications

Item	Performance Characteristics																																		
Operating Temperature Range	-40 to +105°C	-25 to +105°C																																	
Rated Voltage Range	6.3 to 100 VDC	160 to 450 VDC																																	
Capacitance Range	0.1 to 22000 µF	0.47 to 470 µF																																	
Capacitance Tolerance	±20% (120Hz, +20°C)																																		
Leakage Current (+20°C, max.)	I ≤ 0.01 CV or 3 (µA) After 1 minute whichever is greater measured with rated working voltage applied.	I ≤ 0.03 CV (µA) After 1 minute with rated working voltage applied.																																	
Dissipation Factor (tan δ · at 20°C · 120Hz)	<table border="1"> <tr> <td>Working Voltage(VDC)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>100</td> </tr> <tr> <td>D.F. (%)max.</td> <td>22</td> <td>17</td> <td>15</td> <td>14</td> <td>12</td> <td>10</td> <td>9</td> <td>8</td> </tr> </table>								Working Voltage(VDC)	6.3	10	16	25	35	50	63	100	D.F. (%)max.	22	17	15	14	12	10	9	8									
	Working Voltage(VDC)	6.3	10	16	25	35	50	63	100																										
	D.F. (%)max.	22	17	15	14	12	10	9	8																										
<table border="1"> <tr> <td>Working Voltage(VDC)</td> <td>160</td> <td>200</td> <td>250</td> <td>350</td> <td>400</td> <td>450</td> </tr> <tr> <td>D.F. (%)max.</td> <td>12</td> <td>12</td> <td>12</td> <td>15</td> <td>15</td> <td>17</td> </tr> </table>								Working Voltage(VDC)	160	200	250	350	400	450	D.F. (%)max.	12	12	12	15	15	17														
Working Voltage(VDC)	160	200	250	350	400	450																													
D.F. (%)max.	12	12	12	15	15	17																													
For capacitance > 1000 µF, add 2% per another 1000 µF.																																			
Low Temperature Characteristics (at 120Hz)	Impedance ratio max																																		
	<table border="1"> <tr> <td>Working Voltage(VDC)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>100</td> </tr> <tr> <td>Z-25°C / Z+20°C</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z-40°C / Z+20°C</td> <td>8</td> <td>6</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> </tr> </table>								Working Voltage(VDC)	6.3	10	16	25	35	50	63	100	Z-25°C / Z+20°C	4	3	2	2	2	2	2	2	Z-40°C / Z+20°C	8	6	4	3	3	3	3	3
	Working Voltage(VDC)	6.3	10	16	25	35	50	63	100																										
	Z-25°C / Z+20°C	4	3	2	2	2	2	2	2																										
Z-40°C / Z+20°C	8	6	4	3	3	3	3	3																											
<table border="1"> <tr> <td>Working Voltage(VDC)</td> <td>160</td> <td>200</td> <td>250</td> <td>350</td> <td>400</td> <td>450</td> </tr> <tr> <td>Z-25°C / Z+20°C</td> <td>2</td> <td>2</td> <td>3</td> <td>5</td> <td>6</td> <td>6</td> </tr> </table>								Working Voltage(VDC)	160	200	250	350	400	450	Z-25°C / Z+20°C	2	2	3	5	6	6														
Working Voltage(VDC)	160	200	250	350	400	450																													
Z-25°C / Z+20°C	2	2	3	5	6	6																													
For Capacitance > 1000 µF, add 0.5 per another 1000 µF for -25°C / +20°C add 1 per another 1000 µF for -40°C / +20°C																																			
Load Life	Test conditions Duration time :2000Hrs Ambient temperature :+105°C Applied voltage :Rated DC working voltage After test requirements at +20°C Capacitance change :≤ ±20% of the initial measured value Dissipation factor :≤ 200% of the initial specified value Leakage current :≤ The initial specified value																																		
Shelf Life	Test conditions Duration time :1000Hrs Ambient temperature :+105°C Applied voltage :None After test requirements at +20°C: Same limits as Load life. Pre-treatment for measurements shall be conducted after application of DC working voltage for 30 minutes.																																		

Multiplier for Ripple Current vs. Frequency

CAP(µF) \ Frequency(Hz)	50(60)	120	400	1K	10K	50K-100K
CAP ≤ 10	0.8	1	1.30	1.45	1.65	1.70
10 < CAP ≤ 100	0.8	1	1.23	1.36	1.48	1.53
100 < CAP ≤ 1000	0.8	1	1.16	1.25	1.35	1.38
1000 < CAP	0.8	1	1.11	1.17	1.25	1.28

Diagram of Dimensions:(unit:mm)

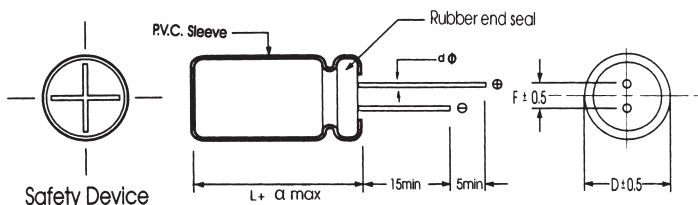

Dψ	5	6.3	8	10	13	16	18	22
F	2.0	2.5	3.5	5.0	5.0	7.5	7.5	10
dψ	0.5			0.6		0.8		
α	D < 18	D = 18		D > 18				
		L < 35.5	L ≥ 35.5					
		1.5	1.5	2	2			

CapXon KM Series

Case Size

φ DxL(mm)

WV (SV) Cap(μF)	6.3 (8)		10 (13)		16 (20)		25 (32)		35 (44)	
	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
4.7							5x11	26	5x11	28
6.8							5x11	32	5x11	36
10					5x11	35	5x11	38	5x11	46
22			5x11	45	5x11	54	5x11	58	5x11	61
33	5x11	54	5x11	60	5x11	64	5x11	69	5x11	75
47	5x11	65	5x11	70	5x11	100	5x11	105	5x11	110
68	5x11	75	5x11	80	5x11	105	6.3x11	120	6.3x11	140
100	5x11	96	5x11	105	5x11	115	6.3x11	145	6.3x11	160
					6.3x11	130			8x11.5	175
120	5x11	110	5x11	120	6.3x11	155	6.3x11	175	8x11.5	185
150	5x11	120	6.3x11	145	6.3x11	170	8x11.5	200	8x11.5	215
	6.3x11	130								
180	6.3x11	140	6.3x11	160	6.3x11	190	8x11.5	210	10x12.5	265
220	6.3x11	160	6.3x11	175	6.3x11	215	8x11.5	235	10x12.5	300
330	6.3x11	195	8x11.5	255	8x11.5	265	8x11.5	310	10x12.5	400
							10x12.5	335		
470	8x11.5	270	8x11.5	290	8x11.5	370	8x11.5	410	10x16	520
							10x12.5	440		
560	8x11.5	310	8x11.5	330	10x12.5	410	10x16	460	10x20	540
			10x12.5	340						
680	8x11.5	360	10x12.5	420	10x12.5	480	10x16	520	13x20	650
820	8x11.5	390	10x12.5	480	10x16	550	10x20	640	13x20	760
1000	10x12.5	430	10x12.5	520	10x16	600	10x20	710	13x20	830
1200	10x12.5	550	10x16	630	10x20	700	13x20	810	13x20	900
									13x25	930
1500	10x16	625	10x16	770	10x20	820	13x20	900	13x25	960
1800	10x16	710	10x20	820	13x20	920	13x20	1050	16x25	1150
2200	10x16	750	10x20	860	13x20	1000	13x25	1200	16x25	1290
	10x20	775							16x31.5	1350
2700	10x20	850	13x20	920	13x20	1080	16x25	1320	16x31.5	1480
3300	13x20	960	13x20	1100	13x25	1200	16x25	1460	16x35.5	1650
3900	13x20	1000	13x20	1280	16x25	1490	16x31.5	1670	18x31.5	1820
4700	13x20	1150	13x25	1350	16x25	1600	16x35.5	1780	18x35.5	1900
5600	13x25	1300	16x25	1490	16x31.5	1720	16x35.5	1890	18x35.5	2000
6800	13x25	1480	16x25	1670	16x31.5	1900	18x35.5	2050		
8200	16x25	1520	16x31.5	1840	16x35.5	2020	18x35.5	2090		
10000	16x25	1680	16x35.5	1900	18x35.5	2060				
12000	16x31.5	1750	16x35.5	2050	18x35.5	2150				
15000	16x35.5	2075	18x35.5	2180						
18000	18x31.5	2150	18x35.5	2205						
22000	18x41	2300								

Ripple Current (mA, rms) at 105°C 120Hz

Radial

CapXon KM Series

φ DxL(mm)

WV (SV) Cap(μF)	50 (63)		63 (79)		100 (125)		160 (200)		200 (250)	
	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
0.1	5x11	1.3	5x11	1.3	5x11	1.9				
0.22	5x11	2.9	5x11	2.9	5x11	3.4				
0.33	5x11	4	5x11	4.5	5x11	5				
0.47	5x11	7	5x11	7	5x11	10	5x11	11	5x11	12
1	5x11	13	5x11	13	5x11	15	5x11	17	6.3x11	17
							6.3x11	19		
2.2	5x11	20	5x11	20	5x11	21	6.3x11	25	6.3x11	25
3.3	5x11	26	5x11	28	5x11	30	6.3x11	32	6.3x11	33
									8x11.5	35
4.7	5x11	32	5x11	32	5x11	35	6.3x11	38	8x11.5	50
							8x11.5	42		
6.8	5x11	40	5x11	40	6.3x11	47	8x11.5	56	8x11.5	60
									10x12.5	63
10	5x11	48	5x11	48	6.3x11	56	10x12.5	75	8x11.5	78
					8x11.5	60			10x12.5	85
22	6.3x11	70	6.3x11	82	8x11.5	90	10x16	105	10x16	125
					6.3x11	75	10x20	120	10x20	130
33	6.3x11	90	6.3x11	100	8x11.5	140	10x20	170	10x20	180
					10x12.5	155			13x20	190
47	6.3x11	115	6.3x11	125	10x12.5	170	13x20	210	13x20	220
			8x11.5	140						
68	8x11.5	155	10x12.5	185	10x16	240	13x20	260	13x25	300
							13x25	280		
100	8x11.5	200	10x12.5	230	10x20	280	13x25	310	16x25	345
							16x25	330		
120	10x12.5	225	10x16	255	10x20	295	16x25	350	16x25	360
									16x31.5	390
150	10x12.5	245	10x16	270	13x20	340	16x25	470	16x31.5	480
					13x25	360				
180	10x16	280	10x16	310	13x20	410	16x25	550	16x31.5	550
					13x25	480			16x35.5	560
220	10x12.5	345	10x16	375	13x25	520	16x35.5	580	16x35.5	670
	10x16	360	10x20	400					18x31.5	690
330	10x16	450	13x20	580	16x25	690	18x35.5	700	18x35.5	750
	10x20	470							18x41	810
470	10x20	600	13x20	690	16x25	820	18x41	860	22x41	925
	13x20	650			16x31.5	860				
560	13x20	660	13x25	770	16x35.5	900				
680	13x25	770	16x25	880	16x35.5	920				
					18x31.5	950				
820	13x25	850	16x25	920	18x35.5	1020				
1000	16x25	1000	16x31.5	1185	18x41	1200				
1200	16x25	1150	16x35.5	1200						
1500	16x31.5	1300	18x31.5	1350						
1800	16x35.5	1480								
2200	16x35.5	1530								
2700	18x35.5	1590								
3300	18x35.5	1750								

Ripple Current (mA, rms) at 105°C 120Hz

CapXon KM Series

WV (SV) Cap(μF)	220		250		350		400		450		φ DxL(mm)
	(270)		(300)		(400)		(450)		(500)		
	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	
0.47			5x11	8	6.3x11	13	6.3x11	14	6.3x11	14	
1			6.3x11	16	6.3x11	16	6.3x11	17	8x11.5	20	
2.2			8x11.5	25	8x11.5	31	8x11.5	35	10x12.5	35	
3.3			8x11.5	33	8x11.5	34	8x11.5	36	10x12.5	38	
					10x12.5	38	10x12.5	41	10x16	50	
4.7			8x11.5	46	8x11.5	47	10x12.5	55	10x16	42	
			10x12.5	50	10x12.5	52	10x16	65			
6.8			10x12.5	70	10x12.5	79	10x16	90	10x20	72	
10			8x11.5	68	10x16	87	10x16	110	10x20	92	
			10x12.5	80	10x20	92	10x20	125	13x20	98	
22			10x20	125	13x20	160	13x20	170	13x25	180	
			13x20	150	13x25	170	13x25	190			
33			13x20	190	13x25	200	13x25	260	16x25	210	
47			13x20	230	16x25	245	16x25	300	16x31.5	340	
			13x25	240	16x31.5	260	16x31.5	360	16x35.5	380	
56			13x25	280	16x25	330	16x31.5	400	16x35.5	400	
68			16x25	355	16x31.5	370	16x35.5	480	18x31.5	460	
							18x31.5	500	18x35.5	470	
82			16x25	370	16x35.5	385	18x31.5	520	18x35.5	480	
100			16x31.5	395	18x31.5	390	18x35.5	550	18x41	560	
120			16x31.5	420	18x35.5	400	18x35.5	580	22x41	650	
			16x35.5	430			18x41	620			
150			16x35.5	460	18x41	420	18x41	650			
180			18x35.5	470	18x41	430	18x45	700			
220			18x35.5	650	22x41	500					
			18x41	700							
330			22x41	780							
470	18x46	1400									

Radial

Ripple Current (mA, rms) at 105°C 120Hz